



产品简介

PFW 欧版反击式破碎机是我司采用德国技术制造，广泛应用于冶金、建材、化工等行业，适用于中等硬度以上脆性物料的粗、中、细碎作业，如石灰石、白云石、砂岩、石墨、岩盐、花岗岩和玄武岩等物料的破碎。具有破碎比大、产量高、产品粒度均匀，破碎流程紧凑，整机结构简单，使用和维修方便等特点。

Brief Description

PFW impact crusher is widely applied in metallurgy, building materials, chemical industries. They are ideal for crushing medium hard brittle materials of coarse, secondary and fine crushing stages, such as limestone, dolomite, sandstone, graphite, rock salt, granite and basalt, with high crushing ratio unequaled output, uniform production size, compact process, simple construction, easy operation and maintenance.

优势和特点


- 该机采用重型化的转子设计，独特的板锤固定装置，具有处理能力大等优势。
- 选配液压控制系统，通过液压装置快速调节出料口大小及出料粒度。
- 自动化液压开顶装置，可迅速地完成板锤等易损件的更换。

Advantages and Characteristics

- The PFW Impact Crusher features a heavy duty rotor design with an improved blow bar fixing method that provides a high reduction ratio. The machine is fitted with a hydraulic opening facility to enable easy access to the wear parts for servicing. Product material size can be varied using the hydrauli adjustment system to reposition the discharge port settings .The blow bars are reversible for longer life.

结构示意图

Structural Drawing

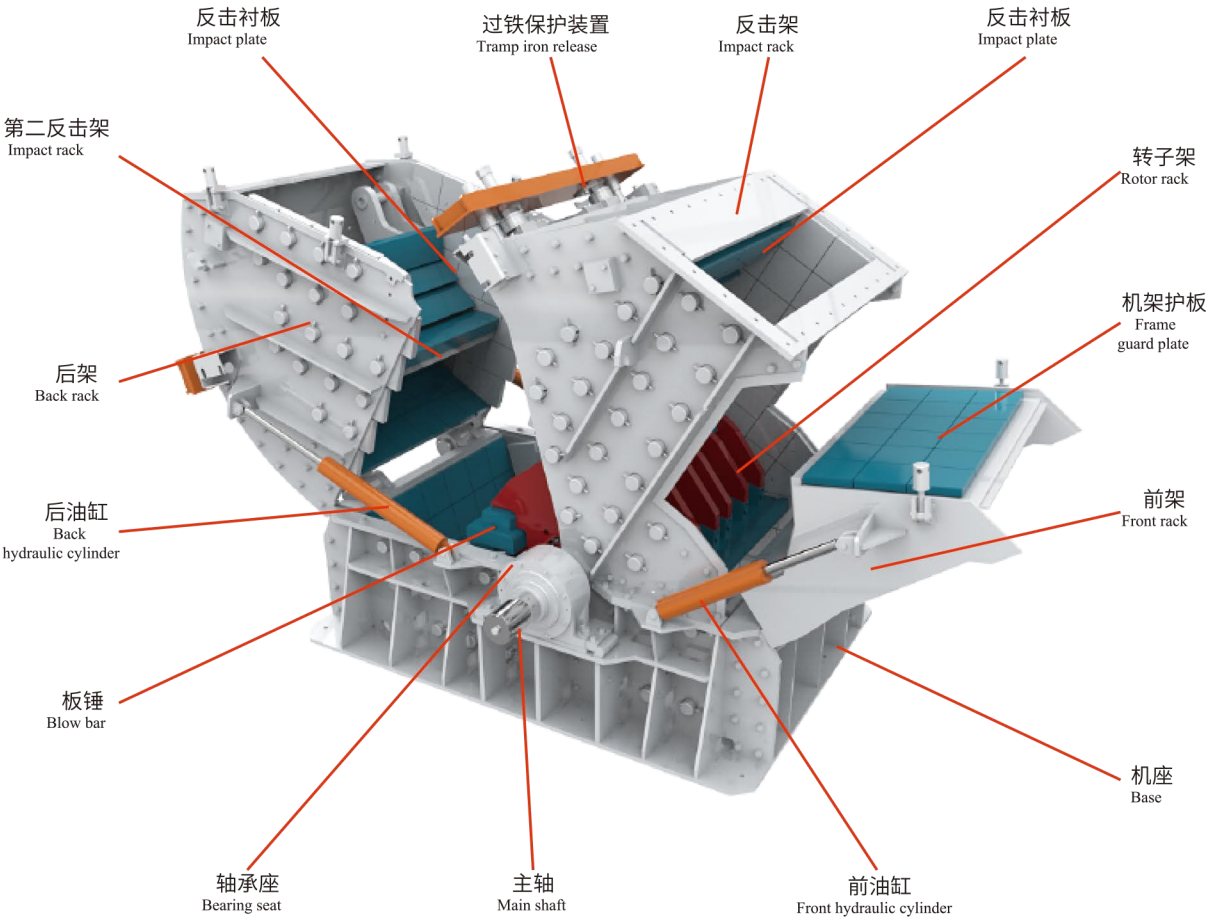

主要技术参数

Main Technical Parameters

| 型号<br>Model | 转子直径<br>Rotor diameter<br>(mm) | 转子长度<br>Rotor length<br>(mm) | 最大进料粒度<br>Max.feed size<br>(mm) | 处理能力<br>Capacity<br>(t/h) | 电机功率<br>Motor power<br>(kw) | 重量<br>Weight<br>(t) | 外型尺寸<br>Dimension<br>(mm) |
|-------------|--------------------------------|------------------------------|---------------------------------|---------------------------|-----------------------------|---------------------|---------------------------|
| PFW-1313    | 1280                           | 1340                         | 200                             | 160-220                   | 132-200                     | 19.8                | 3210x2730x2545            |
| PFW-1515    | 1540                           | 1500                         | 300                             | 250-350                   | 280-315                     | 30                  | 3200x3082x3036            |
| PFW-1618    | 1600                           | 1800                         | 350                             | 440-600                   | 220x2                       | 40.2                | 3447x3790x3160            |